REV.	DATE	DESCRIPTION	BY	APP'D

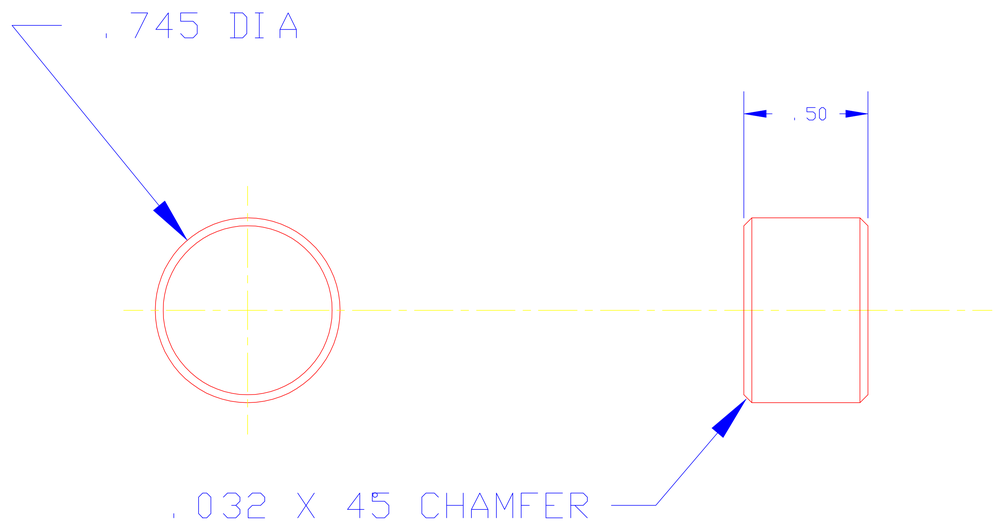

NOTES:

1. MAT'L: 304 SS
2. ALL MACHINING TO BE DONE USING SULFUR-FREE CUTTING OIL.
3. CLEAN FOLLOWING STANDARD PROCEDURES PRIOR TO USE. STORE AS APPROPRIATE FOR UHV-QUALIFIED PARTS.

DRAWN BY VANCE	NUCLEAR PHYSICS LABORATORY UNIVERSITY OF ILLINOIS AT URBANA-CHAMPAIGN	Ta CUP TEST FIXTURE PUSHER		
CHECKED BY	UNLESS OTHERWISE SPECIFIED	PART NO.	SCALE 2=1	FILE
	DIMENSIONS IN INCHES 2 PLACE DEC. ±.01	NO. REQ'D.		
APPROVED BY	BREAK SHARP CORNERS 3 PLACES DEC. ±.003	CHASSIS NO. OR MATERIAL	DATE 6-13-89	DWG. NO. C-2709-115
	FRACTIONAL ±1/32" ANGULAR ±0°30'			